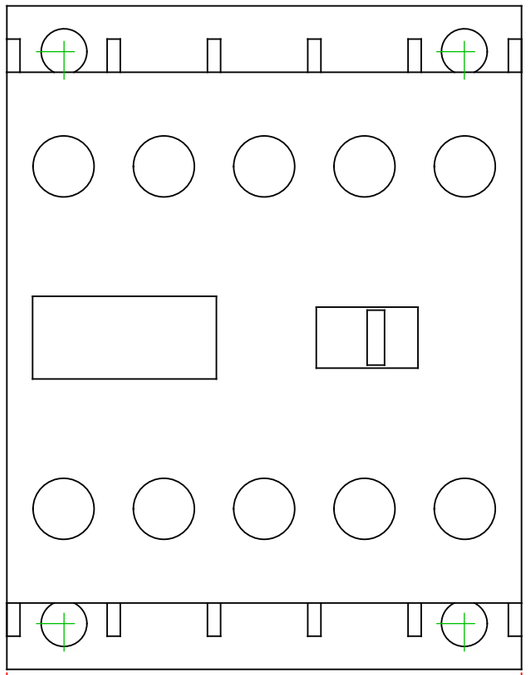


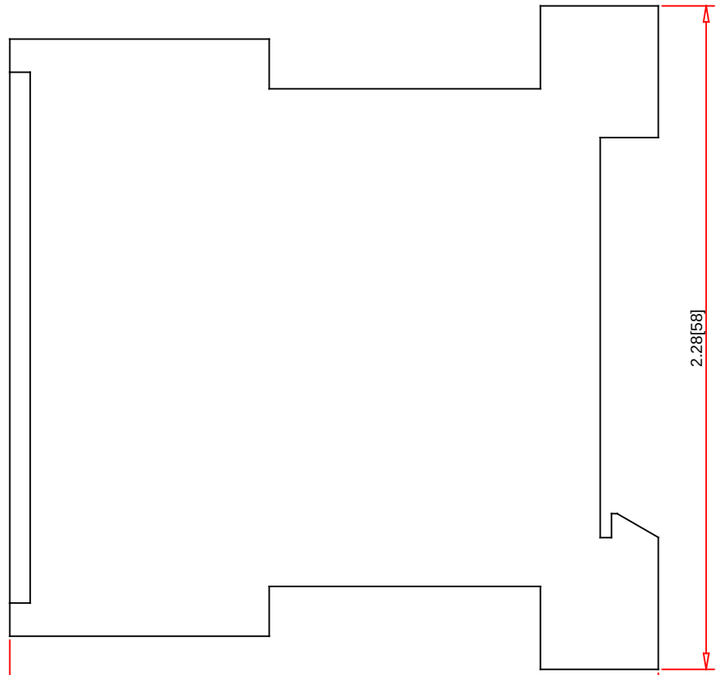


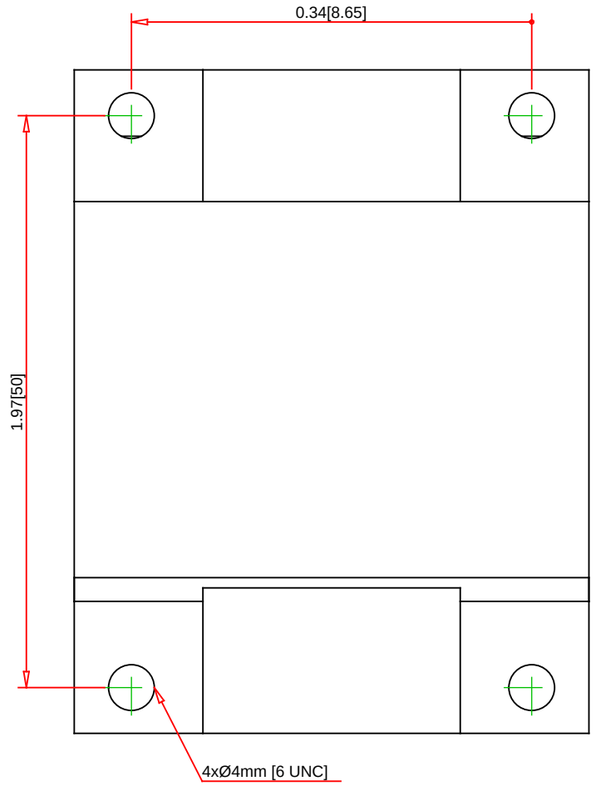


Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

# LC1K0910B7

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone:+1 8773425173
Email: CCC@us.schneider-electric.com

## Technical Information:

| | |
|---|---|
| Rating: | 600V / 9A |
| UL File/CCN: | E164353 / NKCR |
| CSA File: | LR43364 3211 03 |
| Meets Standards: | IEC 60647-1-1 |
| Weight: | 0.40 lb (0.18 kg) |
| Termination Method: | Screw Clamp |
| Wire Size: | Power: #12 - #18 AWG<br>Control: #12 - #18 AWG |
| Terminal torque: | Power: 7 lb-in (0.8 Nm)<br>Control: 7 lb-in (0.8 Nm) |
| Mounting Hwd.: | 35mm DIN Rail, 4mm screw |

## Specification:

| | |
|---|---|
| Description | TeSys K Non-reversing Contactor |
| Type | TeSys K IEC Contactor - 9A - 24Vac Coil |
| Voltages Code: | B7 at 24Vac 50/60 Hz |
| Coil Consumption: | Inrush 30 VA<br>Sealed 4.5 VA |

| Single Phase | | Three Phase | | | |
|---|---|---|---|---|---|
| 115V | 230V | 200V | 230V | 460V | 575V |
| 0.5 HP | 1.5 HP | 2 HP | 3 HP | 5 HP | 5 HP |