sanifirst

SANITARYWARE | HEALTHCARE
LABORATORIES | DISABLED




TECHNICAL DATASHEET

HEALTHCARE TAPWARE

Hospital sink mixer with swivel spout - 75066



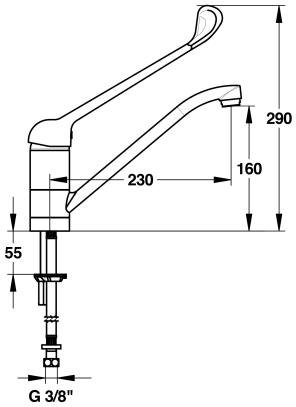

Benefits of the product

- Modul'Mix range: modularity of parts and adaptability to needs
- Retrofitable and customizable
- Elbow control lever: avoiding manual contact
- Comfortable height to spout and projection for washbasin
- Multifunctional cartridge: temperature limit stop with 7 adjustment positions, double flow (hard point at 50% opening).
- Flow between 9 and 12L / min at 3 bar - in accordance with the French norm standard "Medical"; possible flow modification, in case of disassembly of the limiters, by adjusting screw between 4 and 20L / min.
- Fixed or adjustable spout (optional), removable with smooth interior: facilitates cleaning and disinfection, limits the deposit of the biofilm.
- Star-shaped flow straighteners: limits the water spray, no water retention.
- Simple and fast maintenance

Description

Modul'mix single hole sink mixer deck-mount with 171mm long medical handle avoiding manual contact, using elbow, forearm or wrist. Swivel or fixed spout L 230mm. Height to nozzle 160mm. Multifunction ceramic cartridge Ø 40: 7-setting temperature limit stop, dual flow (hard point at 50% opening). Flow between 9 and 12L / min at 3 bar - in accordance with the NF standard "medical environment"; possible flow modification, in case of disassembly of the limiters, by adjusting screw between 4 and 20L / min. Tapware fitted as standard star-shaped flow straightener. Body, spout and controls in polished chrome plated brass. SPEX Hoses, M10x1 LN G'3 / 8 L 350mm Reinforced fixation by a stainless steel rod. 10 year warranty. Sanifirst brand single hole sink mixer, swivel or fixed spout REF: 75066 or approved equivalent.

sanifirst

SANITARYWARE | HEALTHCARE
LABORATORIES | DISABLED



TECHNICAL DATASHEET

Additional Information

Product reference	75066
Previous reference	FL2420MC
Brand	Sanifirst
Warranty	10 years against manufacturing defects
Special feature 1	Swivel spout
Special feature 2	Fixed spout
Height to nozzle (mm)	160
Projection (mm)	230
Lenght of lever (mm)	171
Height of lever (mm)	264
Clip-on spout	No
Flow straightener	Star shaped flow straightener, M24 x 1
Lever	Elbow / forearm / wrist handle
Connection	SPEX hoses 350 mm - M10 X 1 - LN G'3 / 8 with basket filter seals and flow rate limiters
Minimum pressure	1 bar
Recommended pressure	3 bar with a pressure differential less than 1 bar
Maximum pressure	5 bar
Max tightening	40
Cartridge	75312 Ø 40mm, dual flow, flow limiter and temperature limiter
Coating	Nickel > 10 microns - Chrome > 0.3 microns