Terminal with presence detection

11052278
SR 135 D125 S/E ACOUS RAL9003

The SR 135 decorative adjustable core terminal can be used for air diffusion or extraction with a low noise level.



PRODUCT BENEFITS
- aesthetic,
- low noise level,
- adjustable airflow.

Principles of operation
The SR 135 terminal is fitted with an adjustable core to calibrate the airflow on site. The central core also includes soundproofing to ensure low noise levels in the room.

Product description
The SR 135 terminal offers a discreet aesthetic for easy integration in a wall or ceiling. Its soundproofed core is also very discreet in terms of noise. The adjustable core can be moved to set the airflow.

Fields of application
Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings, Mechanical extract ventilation systems, Commercial

Installation
- wall or ceiling installation,
- attached directly in duct using friction springs supplied or using a connection sleeve.


Main characteristics
- steel with RAL 9003 epoxy coating 30% gloss,
- adjustable airflow due to adjustable core with counter-nut,
- soundproofing on core.

Accessories

Description	Variants
Plasterboard sleeve L 100	11053972

Dimensional data

Variants	C (mm)	Ø (mm)	Ø A (mm)	Ø B (mm)	Ø connection (mm)
11052278	15	125	142	160	125

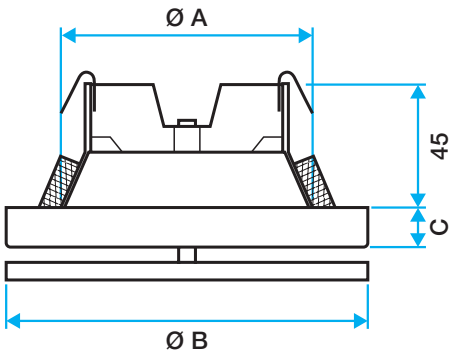

Airflow data

Variants	Comfort airflow for Lw < NR 25 (m³/h)
11052278	150

Terminal with presence detection

11052278
SR 135 D125 S/E ACOUS RAL9003