
Walraven RapidStrut® channel (pg)

(H0410)

for medium weight fixing applications



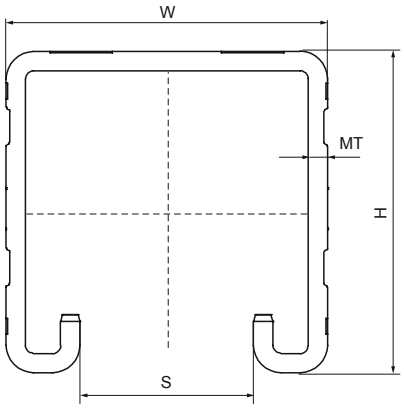

Features & benefits

- universal channel system
- distance between channel end and first hole is always equal
- inward formed flanges with serrated profile for extra grip
- with continuous smart hole pattern including round anchor holes
- with sawing marks each 50 mm on all 3 sides of the profile
- pre-galvanized
- Walraven RapidStrut® 41|H and 62|H tested for fire safety according to EN 1363-1
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'
- Channel stamped in accordance with BS6946:1988

Productnumber	Type	Total Height	Total Width	Total Length	Material Thickness	Profile Opening
Reference Letter		*H*	*W*	*L*	*MT*	*S*
Unit description		*mm*	*mm*	*mm*	*mm*	*mm*
6505224	21 | L	21	41	2,000	1.50	22
6505225	21 | H	21	41	2,000	2.50	22
6505242	41 | M	41	41	2,000	2.00	22
6505244	41 | L	41	41	2,000	1.50	22
6505245	41 | H	41	41	2,000	2.50	22
6505324	21 | L	21	41	3,000	1.50	22
6505325	21 | H	21	41	3,000	2.50	22
6505342	41 | M	41	41	3,000	2.00	22
6505344	41 | L	41	41	3,000	1.50	22
6505345	41 | H	41	41	3,000	2.50	22
6505365	62 | H	62	41	3,000	2.50	22
6505385	82 | H	82	41	3,000	2.50	22
6505624	21 | L	21	41	6,000	1.50	22
6505625	21 | H	21	41	6,000	2.50	22
6505642	41 | M	41	41	6,000	2.00	22
6505644	41 | L	41	41	6,000	1.50	22
6505645	41 | H	41	41	6,000	2.50	22
6505665	62 | H	62	41	6,000	2.50	22
6505685	82 | H	82	41	6,000	2.50	22
6505322	21 | M	21	41	3,000	2.00	22
6505222	21 | M	21	41	2,000	2.00	22
6505622	21 | M	21	41	6,000	2.00	22