
TECHNICAL DATA SHEET

Range: Santé Standard
Ref: 75027 - SWIVEL SPOUT MIXER H145/L170



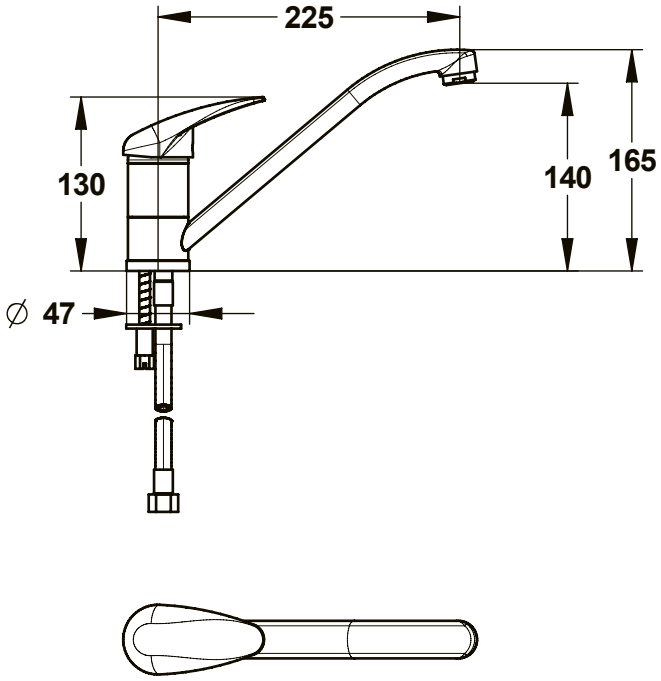

Benefits of the product

- [gras]Comfortable projection for cleaning[gras]
- Smooth tube: easy cleaning and disinfection, limits the formation of biofilm.
- Multifunctional cartridge: temperature limit stop with 7 adjustment positions, dual flow (hard point at 50% opening).
- Flow between 4 and 6L / min at 3 bar - in accordance with the French norm standard "Medical"; possible flow modification, in case of disassembly of the limiters, by adjusting screw between 4 and 20L / min.
- Water savings, safe operation and controlled water consumption.

Model

- Single-hole deck-mounted sink mixer
- Without waste
- Full lever
- Projection: 225 mm. Swivel spout
- Height to spout: 140 mm
- Multifunction ceramic cartridge OE 40: temperature limiter with 7 adjustment positions, dual flow (hard point at 50% opening)
- Star-shaped flow straigthener M24 X 100

Flow rate

- Flow between 4 and 6L / min at 3 bar - in accordance with the NF standard "medical environment"
- Possible flow modification, in case of disassembly of the limiters, by adjusting screw between 4 and 20L / min

Recommended pressure

- 3 bar - avoid pressure differences greater than 1 bar between DHW and DCW
- Minimum pressure: 1 bar.
- Maximum pressure: 5 bar

Material

- Smooth body, spout and lever in polished chrome-plated brass

Connection

- SPEX M12X1 hoses, captive nut G'3 / 8, Lg 350 mm. Basket filters gaskets mounted on the hoses to limit clogging. Flow rate limiters.
- Fixing reinforced by a stainless steel rod

Warranty

- 10 years against any manufacturing defect

Ce document n'est pas contractuel ; nous nous réservons le droit de modifier les caractéristiques de nos produits sans préavis. Toutes nos marques et tous modèles sont déposés.